



Unattended

GAS - DIESEL STEAM BOILER HHWT SERIES 1 MW - 10 MW

The HHWT Series are industrial steam boilers with steam capacities ranging from 1 MW to 10 MW. The HHWT steam boilers are manufactured to Australian standards and comply to AS 2593 for unattended operation. HHWT boilers are available on gas, oil, wood waste or coal firing configurations.

FEATURES

- **Controls** - The control system is based on a modular format using separate modules for the boiler management covering both the feedwater and burner controls. The above provide an insight on the operation of the boiler including diagnostics for assistance with fault finding.

System options include optional PLC and sensors for interface with on site Scada systems, Oxygen trimming for enhancing the boilers optimal efficiency, VF drives for feedwater pumps, and burner fan to further enhance the boiler operating efficiency.

- **Burner** - The HHWT Series Watertube Steam Boilers use a quality forced draft packaged burner of the fully modulating type. The burner being bolted to boiler combustion chamber access door.
- **Feed pumps** - All HHWT Series Boilers are fitted with quality Multistage Feedwater Pumps as standard equipment unless otherwise specified.
- **Boiler Efficiency** - The combustion efficiency on HHWT Series Watertube Steam Boilers will be a guaranteed 80% minimum with higher degrees of efficiency readily obtainable especially with the addition of flue gas economisers.

ADVANTAGES

- HHWT Series unique featured designs provide optimum reliability and minimum maintenance requirements.
- Boilers in this series can be ordered for firing on gas, oil, woodwaste or coal.
- Boilers are built to meet client's requirements and are available on a supply only basis or on a turnkey type operation.

APPLICATIONS

- Hospital Sterilizers
- Autoclaves
- Industrial process handling
- Food manufacturers
- Paper industry
- Pharmaceutical industry
- Rubber processors



Gas - Diesel Steam Boiler

HHWT SERIES 1 MW - 10 MW

Boiler Construction



The HHWT series boilers are of a robust fully welded single drum design that eliminates the need for personnel to enter the steam drum to expand tubes. The boiler, due to the water wall design does not use refractory material for baffles or combustion gas pathways.

A feature of the boiler design is the identification of the downcomers, which are external to the water wall, and pass direct from steam drum to the bottom header.

The modular construction of the boiler has the advantage that any individual tube can be removed and replaced without disturbing adjacent boiler tubes in the tube nest.

Standard approved designs cover the boiler up to 2100 kPa maximum operating pressure. However, unless otherwise specified, the boiler would be supplied to 1000 kPa.

All above boilers are finished in attractive colorbond cladding that is easily removable for maintenance purposes.

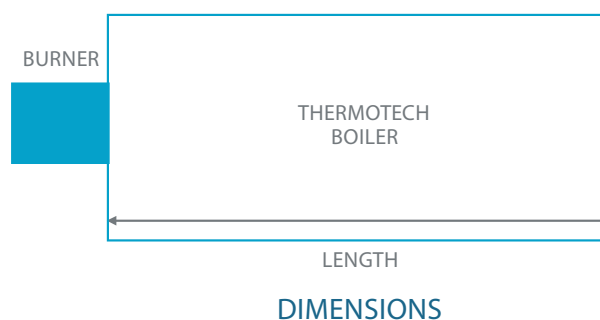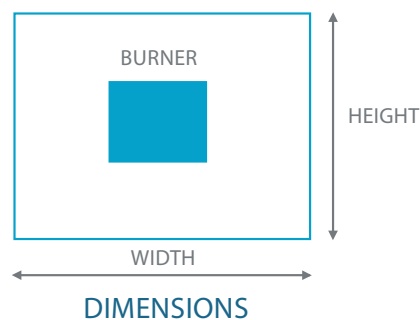

MODEL NUMBER	KW	BOILER HP	OUTPUT KG/HR	INPUT MJ	DIMENSIONS LENGTH	DIMENSIONS WIDTH	DIMENSIONS HEIGHT	SHIPPING WEIGHT
--------------	----	-----------	--------------	----------	-------------------	------------------	-------------------	-----------------

HHWT Series

100HHWT	1000	100	1564	4376	4400	2200	3400	5000kg
125HHWT	1250	125	1956	5471	5000	2200	3400	6000kg
150HHWT	1500	150	2347	6565	5000	2400	3400	7000kg
200HHWT	2000	200	3130	8753	5200	2400	3400	9000kg
250HHWT	2500	250	3912	10942	5550	2400	3400	10000kg
300HHWT	3000	300	4694	13130	5800	3000	3850	14000kg
400HHWT	4000	400	6260	17507	6300	3000	3850	16000kg
500HHWT	5000	500	7825	21884	7300	3000	3850	18000kg
600HHWT	6000	600	9389	26261	8200	3800	4400	24000kg
700HHWT	7000	700	10953	30632	8200	3800	4400	27000kg
800HHWT	8000	800	12520	35008	8600	3800	4400	31000kg
900HHWT	9000	900	14076	39384	8600	3800	4400	33000kg
10HHMW	10000	1000	15640	43760	9000	3800	4400	35000kg

The HHWT series of boilers as listed above are for oil or gas fired units. However, other fuel types are available on request - eg woodwaste, coal etc



Perth W.A
Distributor
A-WEST Distributors

HYDROHEAT SUPPLIES

Melbourne
Head Office
6 Helen Kob Drive
Braeside VIC 3195

Sydney
Unit G7
35-39 Bourke Road
Alexandria NSW 2015

Unit 16 - 52 Kent Street CANNINGTON, WA 6107
Ph: 08 9258 5670 Fax 08 9258 5671
Email: info@awest.com.au Website: www.awest.com.au

Call (03) 9588 1299 | Email info@hydroheat.com.au | Web hydroheat.com.au

QUALITY COMMERCIAL & INDUSTRIAL EQUIPMENT